

## F-UJI Automated FAIR Data Assessment Tool

**FAIRsFAIR has developed F-UJI, a service based on REST, and is piloting a programmatic assessment of the FAIRness of research datasets in five trustworthy data repositories.**



The F-UJI assessment is based on [16 out of 17 core FAIR object assessment metrics](#) developed within FAIRsFAIR and each corresponding to a part or the whole of a FAIR principle. F-UJI adheres to existing web standards and [PID resolution services best practices](#) and utilises external registries and resources such as re3data<sup>1</sup> and Datacite<sup>2</sup> APIs, SPDX License List<sup>3</sup>, RDA Metadata Standards Catalog<sup>4</sup>, and Linked Open Vocabularies (LOV)<sup>5</sup> For information on the practical tests implemented against the metrics, see [Devaraju, Huber, et al., 2020](#).







**The source code is now available with a free license through Github. Any feedback on improving the tool and associated metrics can be added as an issue on [Github](#).**

**To test the F-UJI online test service please visit the new web demo client**

**For more details on the tool, please contact [Robert Huber](#)**

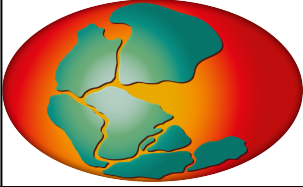
<b>Pilot Repository</b>	<b>Certification</b>	<b>Subject Areas</b>	<b>Repository Representatives</b>
-------------------------	----------------------	----------------------	-----------------------------------



	CoreTrustSeal WDS Regular Member	Earth and Environmental Science	Uwe Schindler Michael Diepenbroek
	CoreTrustSeal	Cultural Heritage	Yuri Carrer Cristiana Bettella GianLuca Drago Giulio Turetta
	CoreTrustSeal	Multiple disciplines	Mikaela Lawrence Dominic Hogan Cynthia Love
	CoreTrustSeal WDS Regular Member	Earth System Science	Andrej Fast Amandine Kaiser Hannes Thiemann
	CoreTrustSeal	Multiple disciplines	Philipp Conzett (Uit/DataverseNO) Gustavo Durand (Harvard/Dataverse) Julian Gautier (Harvard/Dataverse)
	-	Multiple disciplines	Laura Huis in 't Veld Marion Wittenberg Paul Boon



## Screenshots of the tool below

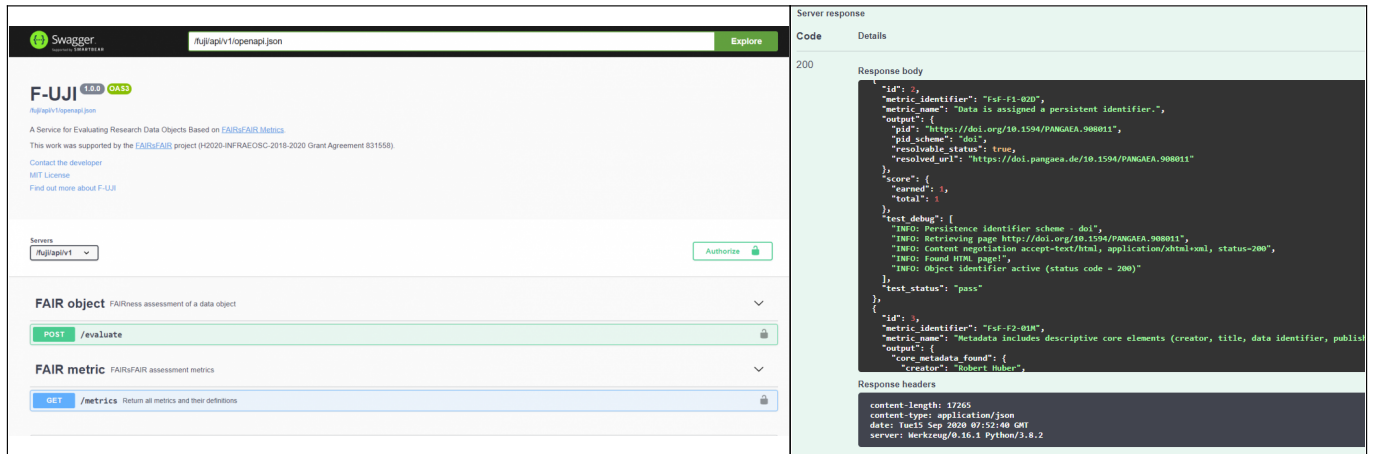

The screenshot displays the Swagger UI for the F-UJI API. The left pane shows the API definition for the /metrics endpoint (GET). The right pane shows the server response for a 200 status code, which is a JSON object containing a score and a list of metrics.

```
Server response
Code Details
200
Response body
{
  "id": "",
  "metric_identifier": "fsf-f1-020",
  "metric_name": "Data is assigned a persistent identifier.",
  "output": {
    "pid": "https://doi.org/10.1594/PANGAEA.908011",
    "pid_scheme": "doi",
    "resolvable_status": true,
    "resolved_url": "https://doi.pangaea.de/10.1594/PANGAEA.908011"
  },
  "score": {
    "passed": 1,
    "total": 1
  },
  "test_debug": [
    "INFO: Persistence identifier scheme - doi",
    "INFO: Retrieving page http://doi.org/10.1594/PANGAEA.908011",
    "INFO: Content negotiation exception/html, application/xhtml+xml, status=200",
    "INFO: Found HTML page!",
    "INFO: Object identifier active (status code = 200)"
  ],
  "test_status": "pass"
}
}
Response headers
content-length: 17265
content-type: application/json
date: Tue, 15 Sep 2020 07:52:40 GMT
server: Werkzeug/0.16.1 Python/3.8.2
```

- <https://www.re3data.org>
- <https://support.datacite.org/docs/api>
- <https://spdx.org/licenses>
- <https://rdamsc.bath.ac.uk>
- <https://lov.linkeddata.es/dataset/lov/>

**All the presentation and the slidedeck are available online here**

## F-UJI webinar presentation

